

FM2005/3N253 THRU FM2010/3N259

IN-LINE GLASS PASSIVATED SINGLE PHASE RECTIFIER BRIDGE

VOLTAGE - 50 to 1000 Volts CURRENT - 2.0 Amperes

 Recognized File #E111753

FEATURES


- Surge overload rating: 60 amperes peak
- Ideal for printed circuit board
- Plastic material has Underwriter Laboratory Flammability Classification 94V-O
- Reliable low cost construction utilizing molded plastic technique

MECHANICAL DATA

Terminals: Lead solderable per MIL-STD-202,
Method 208

Mounting position: Any

Weight: 0.06 ounce, 1.7 grams

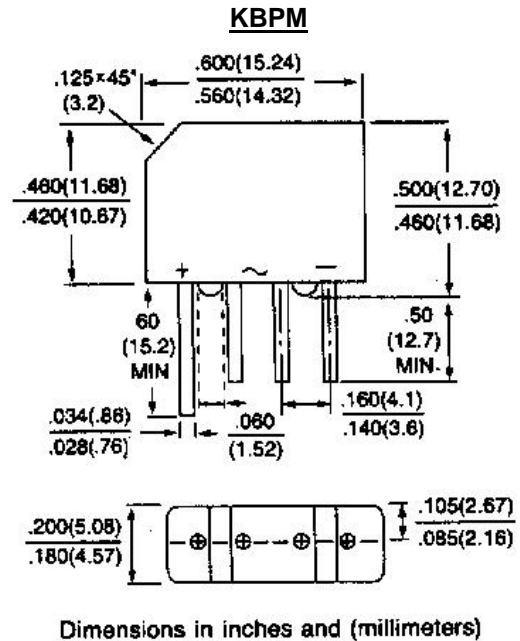

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz.

	FM2005 3N253	FM201 3N254	FM202 3N255	FM204 3N256	FM206 3N257	FM208 3N258	FM2010 3N259	UNITS
Max Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Max RMS Bridge input Voltage	35	70	140	280	420	560	700	V
Max DC Blocking Voltage	50	100	200	400	600	800	1000	V
Max Average Rectified Output Current at 25°C Ambient	2.0							A
Peak One Cycle Surge Overload Current	60.0							A
Max Forward Voltage Drop per Bridge Element at 3.14A dc	1.1							V
Max (Total Bridge) Reverse Leakage at Rated DC Blocking Voltage	5							μA
Max (Total Bridge) Reverse Leakage at Rated DC Blocking Voltage and 100°C	0.5							mA
I ² t Rating for fusing (t < 8.35ms)	15							A ² S
Typical Junction capacitance per leg (Note 1) C _J	25.0							pF
Typical Thermal resistance per leg (Note 2) R _{θJA}	30.0							°C/W
Typical Thermal resistance per leg (Note 2) R _{θJL}	11.0							°C/W
Operating Temperature Range	-55 to +125							°C
Storage Temperature Range	-55 to +150							°C

NOTES:

1. Measured at 1 MHz and applied reverse voltage of 4.0 Volts
2. Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.47x0.47" (12x12mm) copper pads



Fax : 02-25215390 極象有限公司 Tel : 02-25651052

PANJIT

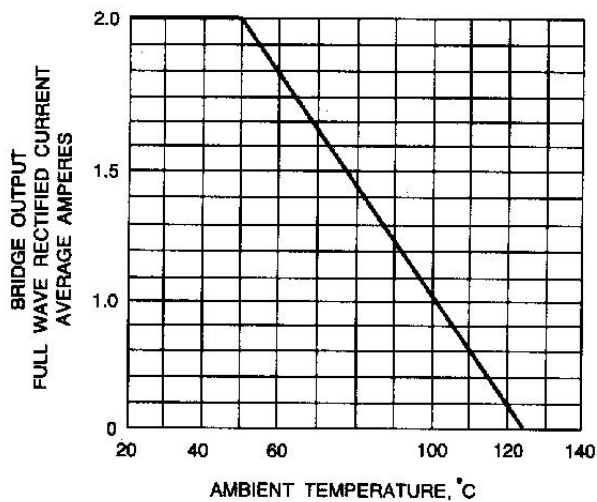


Fig. 1-DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

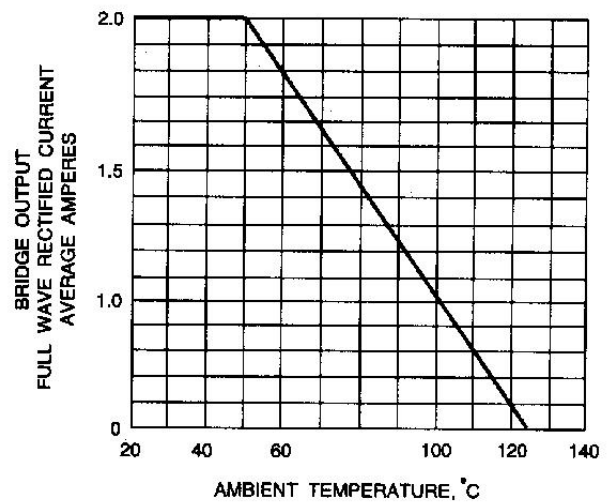


Fig. 2-TYPICAL FORWARD CHARACTERISTICS(25°C)

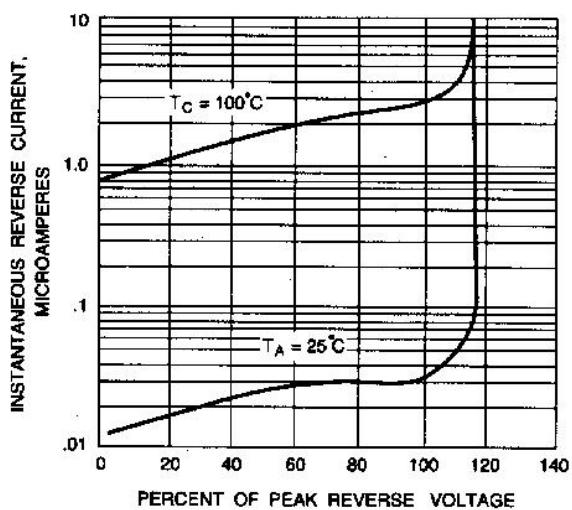


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

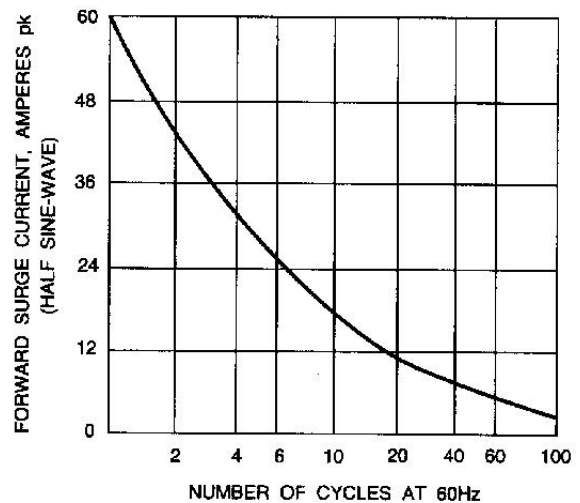


Fig. 4-NON-RECURRENT SURGE RATING